


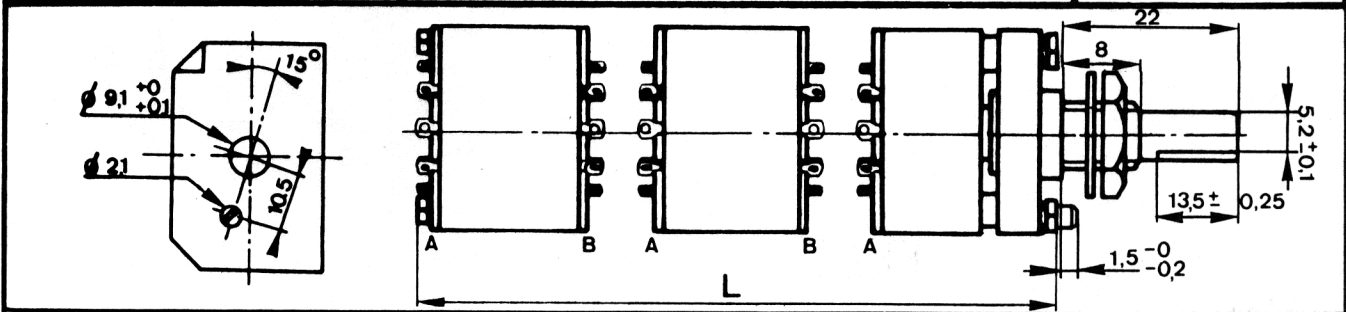
COMPONENT MAINTENANCE MANUAL

Issue :	
Revisions	1: NATO code 1.10.2004




 www.iec-monaco.com
 Tél. +377 92 05 66 88 Fax: +377 92 05 77 26

IEC
ELECTRONIQUE
SJ 328




A 300B 09 60 981A L = 38

FRONT VIEW (SWITCH SIDE)

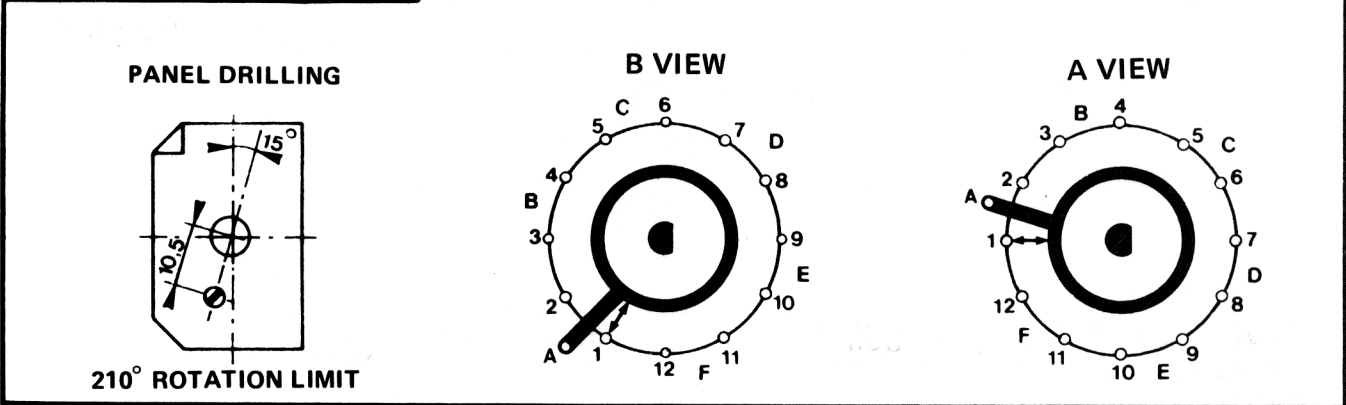


A 300B 09 64 218 B L = 38

FRONT VIEW (SWITCH SIDE)

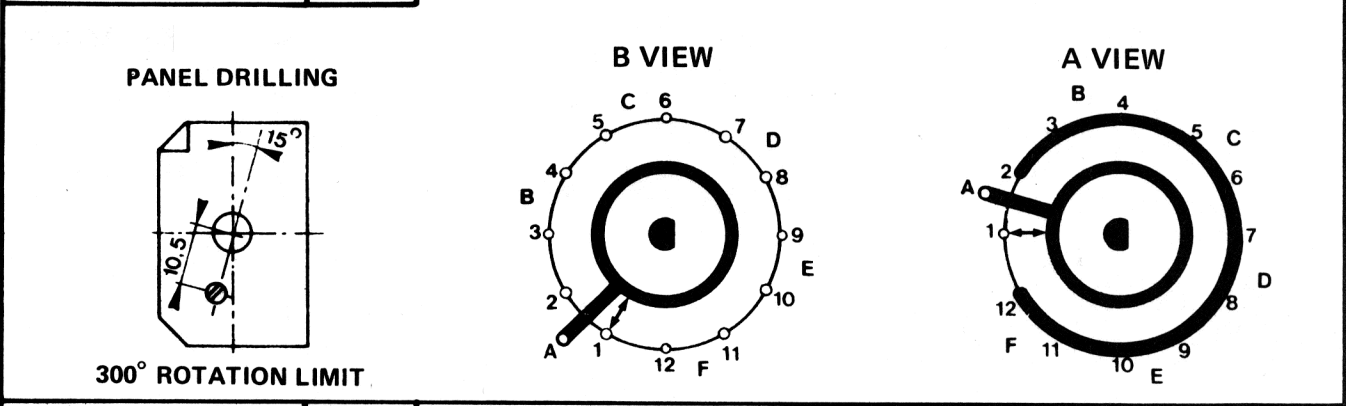

A 300B 09 64 224A L = 38

FRONT VIEW (SWITCH SIDE)

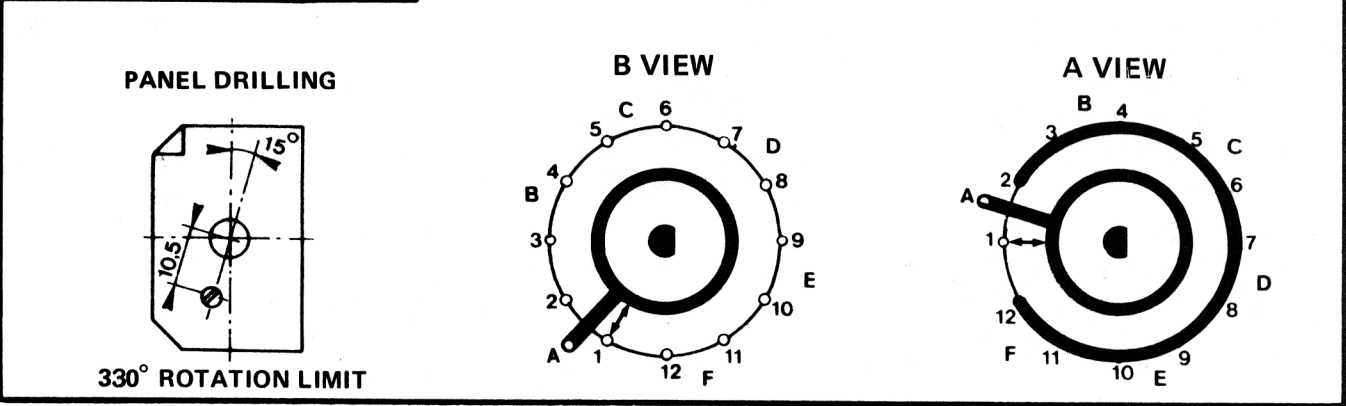


24-09-03

A 300B 09 64 228

L = 38


FRONT VIEW (SWITCH SIDE)

PANEL DRILLING




240° ROTATION LIMIT

B VIEW



A VIEW




A 300B 09 60 6008A

L = 38


FRONT VIEW (SWITCH SIDE)

PANEL DRILLING




150° ROTATION LIMIT

B VIEW



A VIEW




A 300B 09 64 293A

L = 38


FRONT VIEW (SWITCH SIDE)

PANEL DRILLING




300° ROTATION LIMIT

B VIEW



A VIEW



GENERAL CHARACTERISTICS

Max. operating temp. dry heat °C	+ 90
Min. operating temp. dry cold °C	- 60
Switches with solid silver contacts	
Rated voltage (Volts)	150
Rated current (Amp)	1
Max. breaking power (Watts)	45
Contact resistance	0.003

DIELECTRIC STRENGTH IN VOLTS D.C.

Between non shorting contacts	1500
Between contacts and pole-pieces	2000
Between contacts, pole-pieces and ground	1500
Between two adjacent contacts (Megohms)	1.10 ⁶
Between contacts and ground (Megohms)	1.10 ⁵

24-09-03