


COMPONENT MAINTENANCE MANUAL


Issue :	 <p>3, Rue de l'Industrie MC 98000 MONACO</p> <p>www.iec-monaco.com</p> <p>Tél. +377 92 05 66 88 Fax: +377 92 05 77 26</p>	<p>IEC</p> <p>ELECTRONIQUE</p> <p>SJ 328</p>
Revisions 1 : NATO code 1.10.2004		

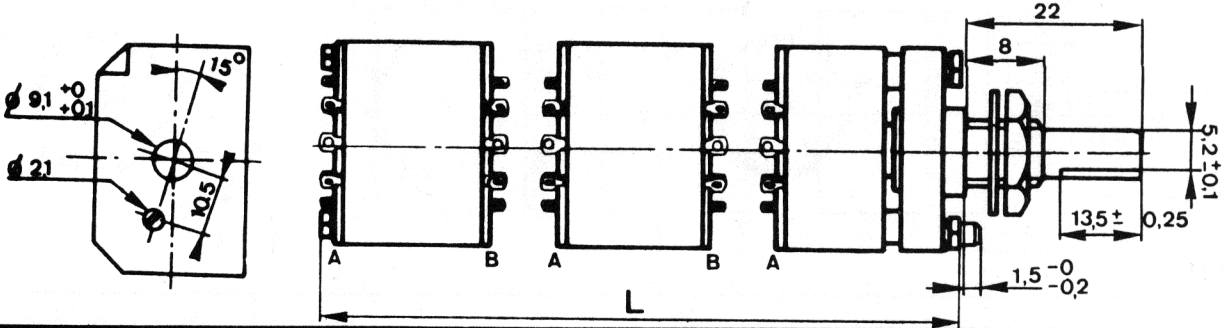


A 300B 09 64 312A L = 38

FRONT VIEW (SWITCH SIDE)


PANEL DRILLING



270° ROTATION LIMIT

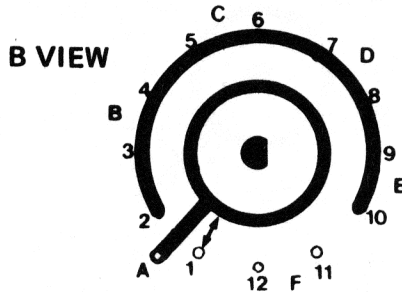


A VIEW




A 300B 09 65 122B L = 38

FRONT VIEW (SWITCH SIDE)


PANEL DRILLING



90° ROTATION LIMIT

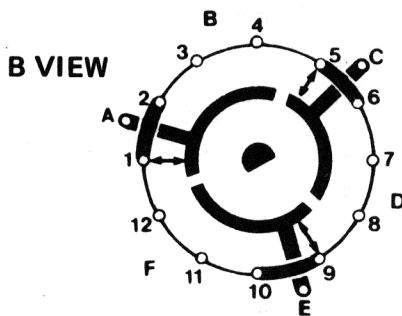

A VIEW

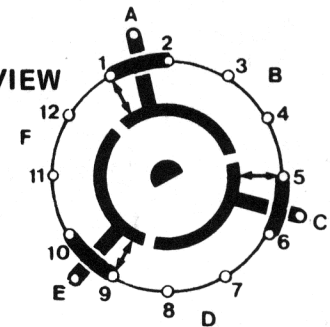


A 300B 09 64 305C L = 44


FRONT VIEW (SWITCH SIDE)

PANEL DRILLING


Angle between
two positions :
60°



60° ROTATION LIMIT

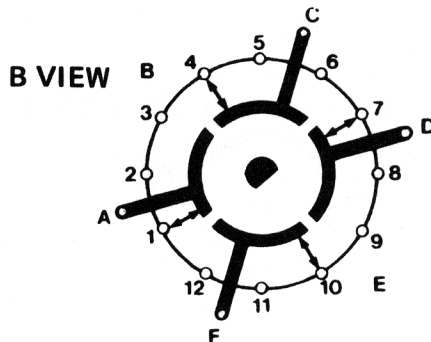

A VIEW

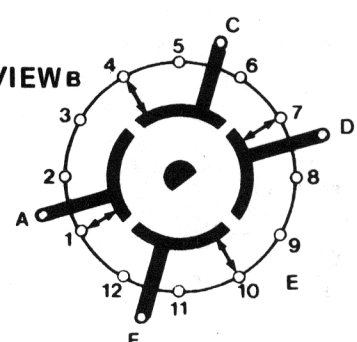


A 300B 09 64 054

L = 55

FRONT VIEW (SWITCH SIDE)


PANEL DRILLING



180° ROTATION LIMIT


Angle between two positions : 90°

1 WAFER




2 WAFER

B VIEW



A VIEW




A 300B 09 61 098

L = 55


FRONT VIEW (SWITCH SIDE)

PANEL DRILLING




WITHOUT STOPS

1 WAFER




2 WAFER

B VIEW



A VIEW



GENERAL CHARACTERISTICS

Max. operating temp. dry heat °C	+ 90
Min. operating temp. dry cold °C	- 60
Switches with solid silver contacts	
Rated voltage (Volts)	150
Rated current (Amp)	1
Max. breaking power (Watts)	45
Contact resistance	0.003
DIELECTRIC STRENGTH IN VOLTS D.C.	
Between non shorting contacts	1500
Between contacts and pole-pieces	2000
Between contacts, pole-pieces and ground	1500
Between two adjacent contacts (Megohms)	1.10 ⁶
Between contacts and ground (Megohms)	1.10 ⁵