
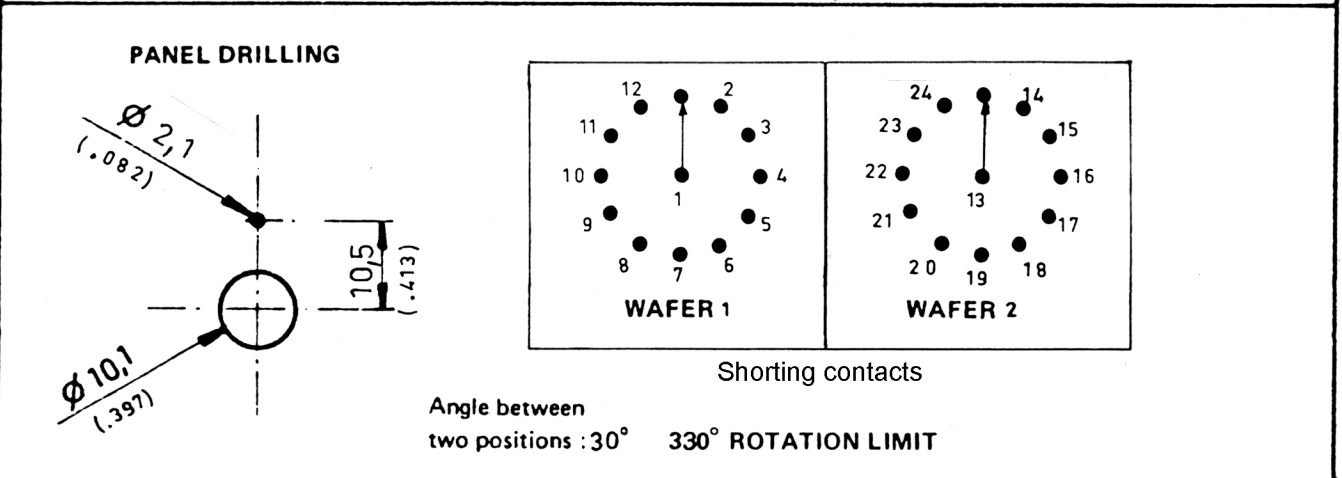


COMPONENT MAINTENANCE MANUAL

Issue Date: 90.12.20	 3, Rue de l'Industrie MC 98000 MONACO www.iec-monaco.com Tél. +377 92 05 66 88 Fax: +377 92 05 77 26	SJ 328 ROTARY SWITCH P.N: 100_3 67_00
----------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------

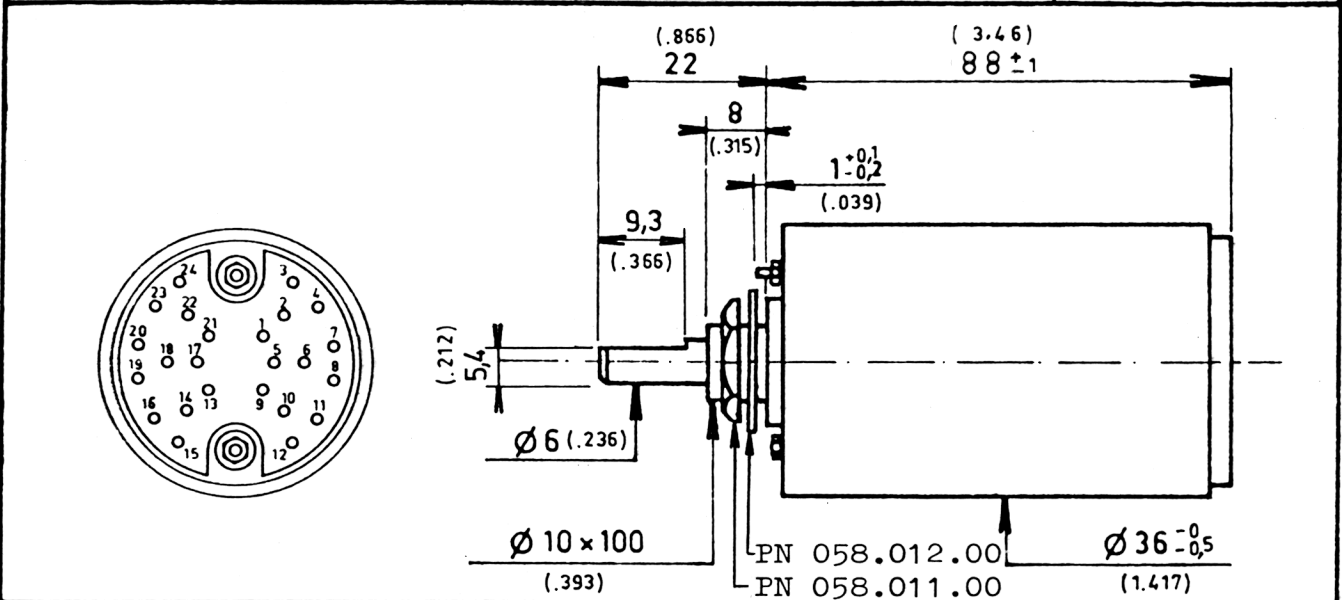

GENERAL CHARACTERISTICS	
Max. operating temp. dry heat	+85°C. (185°F)
Min. operating temp. dry cold	-55°C. (131°F)
Switches with solid silver contacts	
Rated voltage (Volts)	150
Rated current (Amp)	1
Max. breaking power (Watts)	45
Contact resistance	0.003
DIELECTRIC STRENGTH IN VOLTS D.C.	
Between non shorting contacts	1500
Between contacts and pole-pieces	2000
Between contacts, pole-pieces and ground	1500
Between two adjacent contacts (Megohms)	1.10^6
Between contacts and ground (Megohms)	1.10^5